

The automatic varnished steel hose reels with spring are suitable to hold flexible hoses for diesel delivery. They allow to unroll only the necessary hose length, improving their functionality. The rewinding of the hose is fast and safe and it allows to have a free and tidy work place, with ready-to-use equipment, ensuring high safety to workers.

S-460



Ref.	Flow rate	Hose lenght	Ø hose	Inlet-Outlet
	l/min	m	G	
071-1308-500	80	without hose	-	F3/4"G-M1"G
071-1308-508	80	8	3/4"	F3/4"G-M1"G

S-550



Ref.	Flow rate	Hose lenght	Ø hose	Inlet-Outlet
	l/min	m	G	


071-1408-600	95	without hose	-	F1"G - M1"G
071-1408-510	85	10	3/4"	F1"G - M1"G
071-1408-515	85	15	3/4"	F1"G - M1"G
071-1408-610	93	10	1"	F1"G - M1"G

S-555




Ref.	Flow rate	Hose lenght	Ø hose	Inlet-Outlet
	l/min	m	G	

071-1508-600	95	without hose	-	F1"G - M1"G
071-1508-520	83	20	3/4"	F1"G - M1"G
071-1508-615	90	15	1"	F1"G - M1"G

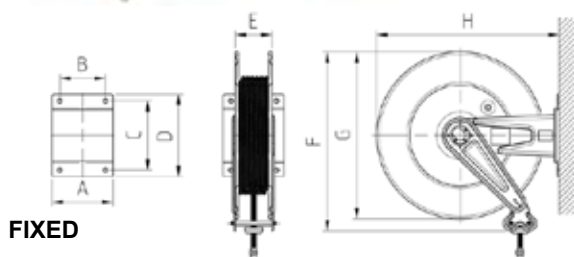

FIXED

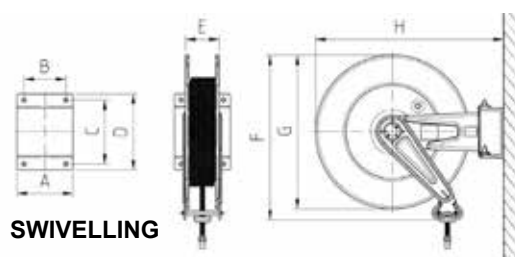

SWIVELLING

OVERALL DIMENSIONS

Mod.	A	B	C	D	E	F	G	H	Kg	Packaging (mm)
F-460	158	120	168	192	95	480	460	500	16,50<19,50	595X265X605
F-550	200	150	225	270	120	590	550	600	22,00<45,00	655X315X700
F-555	250	200	225	270	170	590	550	600	26,00<53,00	655X365X700
F-560	440	390	225	270	360	590	550	600	33,00<83,00	655X555X700
S-460	150	120	168	196	95	480	460	575	17,50<24,00	595X265X605
S-550	200	150	225	270	120	590	550	680	23,00<45,00	655X315X700
S-555	250	200	225	270	170	590	550	680	27,00<54,00	655X365X700