

The automatic hose reels with springs in varnished steel are suitable to hold flexible hoses for the AdBlue® delivery. They allow to untwist quickly only the necessary length, improving the working and functionality.

SX-400



Ref.	Hose lenght	Ø hose	Inlet-outlet
	m	G	

071-2209-400	without hose	-	M 1/2"G - M 1/2"G
071-2209-410	10	1/2"	M 1/2"G - M 1/2"G

SX-460



Ref.	Hose lenght	Ø hose	Inlet-outlet
	m	G	


071-2309-400	without hose	-	M 1/2"G - M 1/2"G
071-2309-415	15	1/2"	M 1/2"G - M 1/2"G

SX-550



Ref.	Hose lenght	Ø hose	Inlet-outlet
	m	G	

071-2409-500	without hose	-	F 3/4"G - M 3/4"G
071-2409-510	10	3/4"	F 3/4"G - M 3/4"G
071-2409-515	15	3/4"	F 3/4"G - M 3/4"G

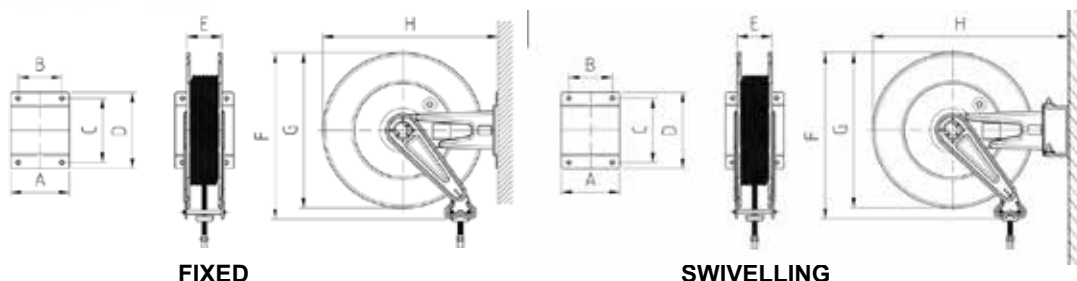

FIXED

SWIVELLING

OVERALL DIMENSIONS

Mod.	A	B	C	D	E	F	G	H	Kg	Packaging (mm)
FX-400	158	120	168	192	95	450	400	435	12,50<19,50	600X260X540
FX-460	158	120	168	192	95	480	460	500	16,50<23,00	600X260X500
FX-550	200	150	225	270	120	590	550	600	22,00<45,00	640X300X685
SX-400	150	120	168	196	95	450	400	510	13,50<20,50	640X350X685
SX-460	150	120	168	196	95	480	460	575	17,50<24,00	640X350X685
SX-550	200	150	225	270	120	590	550	680	23,00<45,00	640X350X685