

### Art. 021-1218-000


Air-operated industrial oil pump Mod. 1218 flanged  
Ratio=18:1 double-acting Delivery capacity 25 l/min  
For wall-fixing or fixed positions.  
Polyurethane seals

### Art. 021-1218-094

Air-operated industrial oil pump Mod. 1218 flanged  
Ratio=18:1 double-acting Delivery capacity 25 l/min  
For drums of 180-220 l  
Polyurethane seals


### Art. 021-1218-125

Air-operated industrial oil pump Mod. 1218 flanged  
Ratio=18:1 double-acting Delivery capacity 25 l/min  
For tanks of 750-1500 l  
Polyurethane seals

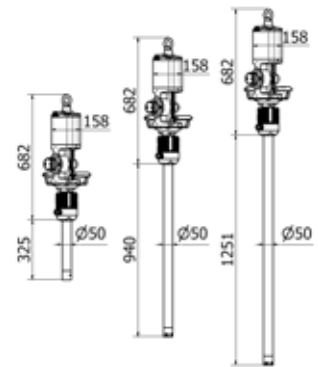

Art.	Weight (Kg)	Volume (m³)	Quantity (No.)
021-1218-000	24,800	0,110	1
021-1218-094	29,200	0,150	1
021-1218-125	32,200	0,180	1

Technical Data	021-1218-000	021-1218-094	021-1218-125
Compression ratio	18:1	18:1	18:1
Working pressure	bar	8	8
Air consumption at 8 bar	m³/min	2,90	2,90
Air inlet connection	BSP	F 1/2" G	F 1/2" G
Fluid outlet connection	BSP	M 3/4" G	M 3/4" G
Fluid delivery cap. at 8 bar	l/min	25	25
Noise	dB	80	80
Shank diameter	mm	50	50
Shank length	mm	Modular F 1"	940
For drums	l	-	180-220
			750-1500

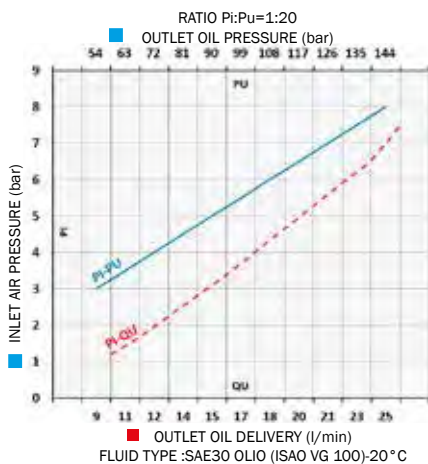

These pumps are advised for the transfer of low-high viscosity oil and similar fluids for medium-long distances. The delivery capacity of a pump varies according to particular applications and combinations. The operating pressure may vary between a minimum of 3 bar and a maximum of 8 bar.

The double-acting guarantees the delivery of a continuous and constant flow, suitable for installations on distribution facilities. To optimize the performance and the time-life of the air-operated pumps we advise to use filtered and lubricated air.