




024-1244-G00



024-1244-H00

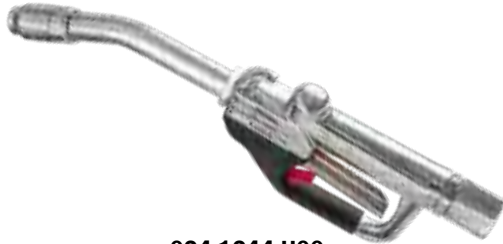

024-1245-G00



024-1245-H00



024-1245-005

FEATURES

- Easy calibration
- Double totalizer
- Electronic rekit
- High precision
- Ergonomic grip
- Lever block is included
- Low battery consumption
- Different units of measurements can be selected: litres, pints, quarts or gallons.
- Not approved for public usage

Art. 024-1244-G00

Oil dispensing nozzle high delivery

Flow rate 90 l/min max press. 100 bar

Composed by:

Aluminium handle with F 3/4" swivel joint

Button to block the lever

Flexible end M 3/4" 380 mm lenght

Semiautomatic drop valve Ø 35 mm

Art. 024-1244-H00

Oil dispensing nozzle high delivery

Flow rate 90 l/min max press. 100 bar

Composed by:

Aluminium handle with F 3/4" swivel joint

Button to block the lever

Rigid end 30° 210 mm lenght

Semiautomatic drop valve Ø 35 mm

Art. 024-1245-G00

Oil digital dispensing nozzle high delivery

Flow rate 60 l/min max press. 70 bar

Composed by:

Oil digital flow meter (Art.024-1245-005)

Rubber protection

Aluminium handle with F 3/4" swivel joint

Flexible end M 3/4" l 380 mm

Semiautomatic drop valve Ø 35 mm

Art. 024-1245-H00

Oil digital dispensing nozzle high delivery

Flow rate 60 l/min max press. 70 bar

Composed by:

Oil digital flow meter (Art.024-1245-005)

Rubber protection

Aluminium handle with F 3/4" swivel joint

Rigid end 30° l 210 mm

Semiautomatic drop valve Ø 35 mm

Art. 024-1245-005

Oil digital flow meter high delivery

It is equipped with two displays, one for partial measures (rekittable) to 5 digits and one for total measures (notrekittable) to 8 digits of the dispensed fluid

Technical Data	024-1245-005
Inlet/outlet connection	F 3/4" BSP
Pressure min/max	0,35 - 70 bar
Flow min/max	6 - 60 l/min
Temperature	-10° + 50° C
Accuracy	+/- 0,5%
Lithium battery	2 x 1,5V AAA