



Meclube Model FOOD SS35

Made of electro-polished
SS AISI 316

Compression ratio:

1:1

Max flow-rate:

35 l/min

Fluid connections:

1" Tri-Clamp

FDA
compliant


EX II 3/3 GD h IIB T4 135 °C ATEX zone2

ARTICLE	CASING	DIAPHRAGM	BALLS	GASKET	FLUIDS
028-F035-AB1	SS AISI 316 E-P	HYTREL+PTFE	SS AISI 316	PTFE	high viscosity food products
028-F035-AB2	SS AISI 316 E-P	HYTREL+PTFE	PTFE	PTFE	low viscosity food and drink products

Technical data

Fluid connections:	1" Tri-Clamp
Air connection:	6 mm
Max flow-rate:	35 l/min
Max air pressure:	7 bar
Max delivery head:	70 m
Max Suction Lift Dry:	5 m
Max Suction Lift Wet:	9,8 m
Max Solid passing:	3 mm
Noise level:	65 dB
Displacement per cycle:	65 cm³
Max Viscosity:	15000 cps

Performance

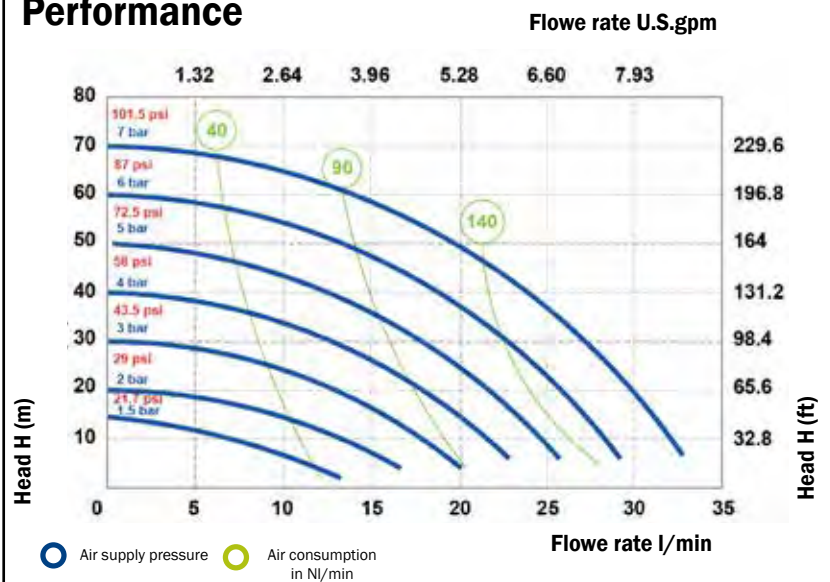

The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20 °C, and vary according to the construction material.

Dimensions

Food SS35

A (mm)	184
B (mm)	106
C (mm)	203
Gross weight kg	4,47
MAX Temperature	-20 °C + 95 °C

