

# FIXED AUTOMATIC HOSE REELS IN AISI 304 STAINLESS STEEL FOR ANTIFREEZE - WINDSCREEN - AdBlue® 20 bar

Equipped with:

- Black antistatic synthetic rubber EPDM hoses
- AISI 316 stainless steel connections
- AISI 316 stainless steel 90° swivelling joint
- Viton® seals



FX-400	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-2209-400	without hose	-	-	F1/2"G - M1/2"G
	070-2209-410	10 m	1/2"	20 bar	F1/2"G - M1/2"G



FX-460	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-2309-400	without hose	-	-	F1/2"G - M1/2"G
	070-2309-415	15 m	1/2"	20 bar	F1/2"G - M1/2"G




FX-550	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-2409-400	without hose	-	-	F1/2"G - M1/2"G
	070-2409-500	without hose	-	-	F1"G - M3/4"G
	070-2409-420	20 m	1/2"	20 bar	F1/2"G - M1/2"G
	070-2409-425	25 m	1/2"	20 bar	F1/2"G - M 1/2"G
	070-2409-510	10 m	3/4"	20 bar	F1"G - M3/4"G
	070-2409-515	15 m	3/4"	20 bar	F1"G - M3/4"G



FX-555	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-2509-500	without hose	-	-	F1"G - M3/4"G
	070-2509-520	20 m	3/4"	20 bar	F1"G - M3/4"G

## OVERALL DIMENSIONS FIXED VERSION

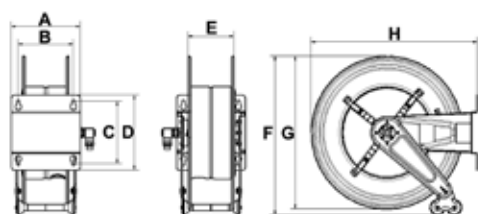

Mod.	A	B	C	D	E	F	G	H	 Kg	 m³	 N°
FX-400	158	120	168	192	95	460	400	435	12,50<19,50	0,084	1
FX-460	158	120	168	192	95	490	460	490	16,50<23,00	0,094	1
FX-550	200	150	225	270	120	590	550	600	22,00<45,00	0,130	1
FX-555	250	200	225	270	170	590	550	600	26,00<53,00	0,150	1