

FIXED AUTOMATIC HOSE REELS IN AISI 304 STAINLESS STEEL FOR GASOLINE 16 bar

Equipped with:

- Black antistatic synthetic rubber hoses steel wire helix with high strength syntetic textile plies, copper wire
- Reference regulations: EN 1761 - EN 12115 ATEX (EX ZONE)
- Self-extinguishing according to: TRbf 131/2
- Galvanized steel connections
- Galvanized steel 90° swivelling joint - Viton® seals
- Compliant with ATEX directive (see ATEX regulation at page 390)



II 2 G Ex h IIB T4 Gb X
II 2 D Ex h IIIC T4 Db



FX-550

Article	Capacity	L. hose	Ø hose	Inlet-Outlet
070-2418-600	95 l/min	without hose	-	F1"G - M1"G
070-2418-510	90 l/min	10 m	3/4" - 19x27	F1"G - M1"G
070-2418-515	85 l/min	15 m	3/4" - 19x27	F1"G - M1"G
070-2418-610	95 l/min	10 m	1" - 25x35	F1"G - M1"G




FX-555

Article	Capacity	L. hose	Ø hose	Inlet-Outlet
070-2518-600	95 l/min	without hose	-	F1"G - M1"G
070-2518-520	83 l/min	20 m	3/4" - 19x27	F1"G - M1"G
070-2518-615	90 l/min	15 m	1" - 25x35	F1"G - M1"G



FX-560

Article	Capacity	L. hose	Ø hose	Inlet-Outlet
070-2618-600	95 l/min	without hose	-	F1"G - M1"G
070-2618-530	80 l/min	30 m	3/4" - 19x27	F1"G - M1"G
070-2618-620	87 l/min	20 m	1" - 25x35	F1"G - M1"G
070-2618-630	85 l/min	30 m	1" - 25x35	F1"G - M1"G

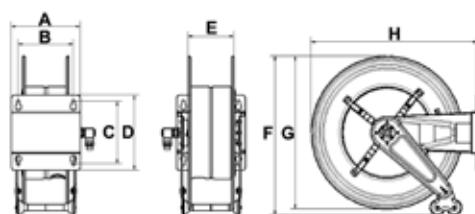

OVERALL DIMENSIONS FIXED VERSION

Mod.	A	B	C	D	E	F	G	H			
FX-550	200	150	225	270	120	590	550	600	22,00<45,00	0,130	1
FX-555	250	200	225	270	170	590	550	600	26,00<53,00	0,150	1
FX-560	440	390	225	270	360	590	550	600	33,00<83,00	0,240	1