

FIXED AUTOMATIC HOSE REELS IN AISI 304 STAINLESS STEEL FOR FOOD 120 °C 15 bar

Equipped with:

- White EPDM rubber tubes with blue cover
- Regulations: DM 21/3/73 e 18/6/79 + FOOD QUALITY F.D.A.
- AISI 316 stainless steel connections
- AISI 316 stainless steel 90° swivelling joint - PTFE Seals



FX-400

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2213-400	without hose	1/2"	-	F1/2"G - M1/2"G
070-2213-410	10 m	1/2"	15 bar	F1/2"G - M1/2"G



FX-460

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2313-400	without hose	-	-	F1/2"G - M1/2"G
070-2313-415	15 m	1/2"	15 bar	F1/2"G - M1/2"G



FX-550

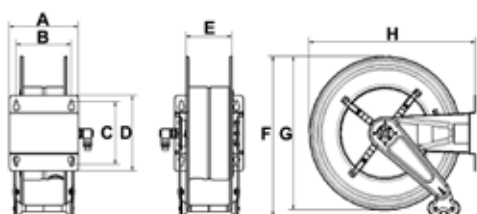
Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2413-400	without hose	1/2"	-	F1/2"G - M1/2"G
070-2413-500	without hose	3/4"	-	F1"G - M3/4"G
070-2413-420	20 m	1/2"	15 bar	F1/2"G - M1/2"G
070-2413-425	25 m	1/2"	15 bar	F1/2"G - M1/2"G
070-2413-515	15 m	3/4"	15 bar	F1"G - M3/4"G






FX-555

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2513-400	without hose	1/2"	-	F1/2"G - M1/2"G
070-2513-500	without hose	3/4"	-	F1"G - M3/4"G
070-2513-600	without hose	1"	-	F1"G - M1"G
070-2513-430	30 m	1/2"	15 bar	F1/2"G - M1/2"G
070-2513-520	20 m	3/4"	15 bar	F1"G - M3/4"G

OVERALL DIMENSIONS FIXED VERSION



Mod.	A	B	C	D	E	F	G	H			
FX-400	158	120	168	192	95	460	400	435	12,50<19,50	0,084	1
FX-460	158	120	168	192	95	490	460	490	16,50<23,00	0,094	1
FX-550	200	150	225	270	120	590	550	600	22,00<45,00	0,130	1
FX-555	250	200	225	270	170	590	550	600	26,00<53,00	0,150	1