

# SWIVELLING CLOSED HOSE REELS IN AISI 304 STAINLESS STEEL

## FOR AIR-WATER 28 bar

Equipped with:

- Black synthetic rubber hoses R6
- Galvanized steel connections
- Brass 90° swivelling joint
- Viton® seals

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
075-5502-300	without hose	-	-	F1/2"G - M3/8"G
075-5502-400	without hose	-	-	F1/2"G - M1/2"G
075-5502-212	12 m	5/16"	28 bar	F1/2"G - M1/4"G
075-5502-218	18 m	5/16"	28 bar	F1/2"G - M1/4"G
075-5502-310	10 m	3/8"	28 bar	F1/2"G - M3/8"G
075-5502-318	18 m	3/8"	28 bar	F1/2"G - M3/8"G
075-5502-410	10 m	1/2"	28 bar	F1/2"G - M1/2"G
075-5502-415	15 m	1/2"	28 bar	F1/2"G - M1/2"G

CSX-500



## FOR WATER 150 °C 200 bar

Equipped with:

- Blue no trace synthetic rubber hoses 1SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
075-5505-300	without hose	-	-	F1/2"G - M3/8"G
075-5504-210	10 m	5/16"	200 bar	F1/2"G - M3/8"G
075-5504-215	15 m	5/16"	200 bar	F1/2"G - M3/8"G
075-5504-310	10 m	3/8"	200 bar	F1/2"G - F3/8"G
075-5504-315	15 m	3/8"	200 bar	F1/2"G - F3/8"G
075-5504-318	18 m	3/8"	200 bar	F1/2"G - F3/8"G

CSX-500




## FOR WATER 150 °C 400 bar

Equipped with:

- Blue no trace synthetic rubber hoses 2SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
075-5505-300	without hose	-	-	F1/2"G - M3/8"G
075-5505-310	10 m	3/8"	400 bar	F1/2"G - F3/8"G
075-5505-315	15 m	3/8"	400 bar	F1/2"G - F3/8"G
075-5505-318	18 m	3/8"	400 bar	F1/2"G - F3/8"G

CSX-500

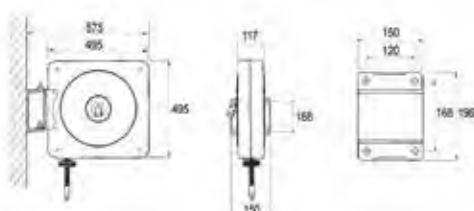

CSX-500 23,600<30,550 0,094 1