

AUTOMATIC HOSE REELS IN AISI 304 STAINLESS STEEL SERIES HEAVY - DUTY FOR DIESEL 10 bar



Equipped with:

- Black antistatic rubber hoses
- Galvanized steel connections
- Galvanized steel - anodized aluminum 90° swivelling joint
- Viton® seals

HDX-460	Article	Capacity	L. hose	Ø hose	Inlet-Outlet
	073-2308-500	80 l/min	without hose	-	F1" G - M1" G
	073-2308-508	80 l/min	8 m	3/4" - 19x27	F1" G - M1" G



HDX-550	Article	Capacity	L. hose	Ø hose	Inlet-Outlet
	073-2408-600	95 l/min	without hose	-	F1" G - M1" G
	073-2408-510	90 l/min	10 m	3/4" - 19x27	F1" G - M1" G
	073-2408-515	85 l/min	15 m	3/4" - 19x27	F1" G - M1" G
	073-2408-610	95 l/min	10 m	1" - 25x35	F1" G - M1" G

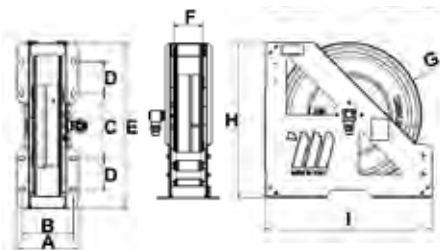





HDX-555	Article	Capacity	L. hose	Ø hose	Inlet-Outlet
	073-2508-600	95 l/min	without hose	-	F1" G - M1" G
	073-2508-520	83 l/min	20 m	3/4" - 19x27	F1" G - M1" G
	073-2508-615	90 l/min	15 m	1" - 25x35	F1" G - M1" G



HDX-560	Article	Capacity	L. hose	Ø hose	Inlet-Outlet
	073-2608-600	95 l/min	without hose	-	F1" G - M1" G
	073-2608-530	80 l/min	30 m	3/4" - 19x27	F1" G - M1" G
	073-2608-540	75 l/min	40 m	3/4" - 19x27	F1" G - M1" G
	073-2608-620	87 l/min	20 m	1" - 25x35	F1" G - M1" G
	073-2608-630	85 l/min	30 m	1" - 25x35	F1" G - M1" G

OVERALL DIMENSIONS



Mod.	A	B	C	D	E	F	G	H	I	 Kg	 m ³	
HDX-460	196	163	209	100	529	95	460	495	534	23,28<26,78	0,072	1
HDX-550	230	197	324	100	644	120	550	597	649	40,10<47,35	0,120	1
HDX-555	280	247	324	100	644	170	550	597	649	51,50<62,53	0,145	1
HDX-560	460	427	324	100	644	350	550	597	649	60,90<83,02	0,230	1