



Art. 020-1185-000
Double-acting air-operated oil pump Mod.810
ratio=10:1 Delivery capacity 30 l/min

For wall-fixing or fixed positions.
 With additional accessories it allows to make different applications.
Polyurethane seals

Art. 020-1186-000
Double-acting air-operated oil pump Mod.810
ratio=10:1 Delivery capacity 30 l/min

For standard drums of **180-220 l**
 (shank length 940 mm)
Polyurethane seals

Art. 020-1187-000
Double-acting air-operated oil pump Mod.810
ratio=10:1 Delivery capacity 30 l/min



For standard tanks of **750-1500 l**
 (shank length 1250 mm)
Polyurethane seals

With threaded ring for drum connection.

They are suitable for workshops oil distribution applications for industrial vehicles in which it is requested a high delivery with more dispensing points.



020-1185-000	10,300	0,011	1
020-1186-000	11,600	0,023	1
020-1187-000	12,800	0,028	1

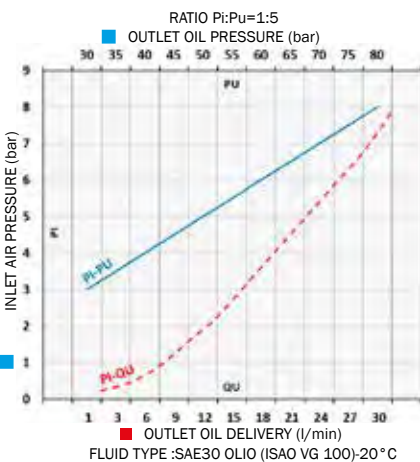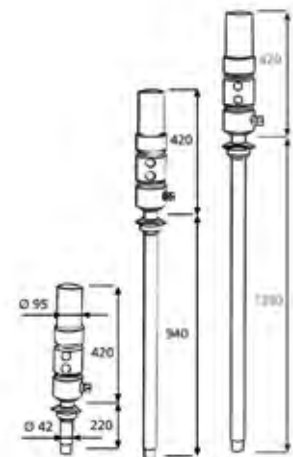

Technical Data	020-1185-000	020-1186-000	020-1187-000	
Compression ratio	10:1	10:1	10:1	
Working pressure	bar	6-8	6-8	
Air consumption	l/min	385	385	
Air inlet connection	BSP	F 3/8" G	F 3/8" G	
Oil outlet connection	BSP	M 3/4" G	M 3/4" G	
Oil delivery capacity 8 bar	l/min	30	30	
Noise	dB	80	80	
Shank diameter	mm	42	42	
Shank length	mm	220	940	1250
For drums with capacity of	l	-	180-220	750-1500

These pumps are advised for the transfer of medium-high viscosity oil (SAE 15/240) and anti-freeze, for medium-long distances (150 - 200 m). The delivery capacity of a pump varies according to particular applications and combinations: the pressure of air supplied; viscosity and temperature of the fluid; dimensions of delivery hose; dimensions of connections and type of gun which is used. The operating pressure may vary between a minimum of 3 bar and a maximum of 8 bar. The double-acting guarantees the delivery of a continuous and constant flow, suitable for installations on distribution facilities. To optimize the performance and the time-life of the air-operated pumps we advise to use filtered and lubricated air.