


WALL DISPENSER FOR DIESEL TRANSFER "Compact"

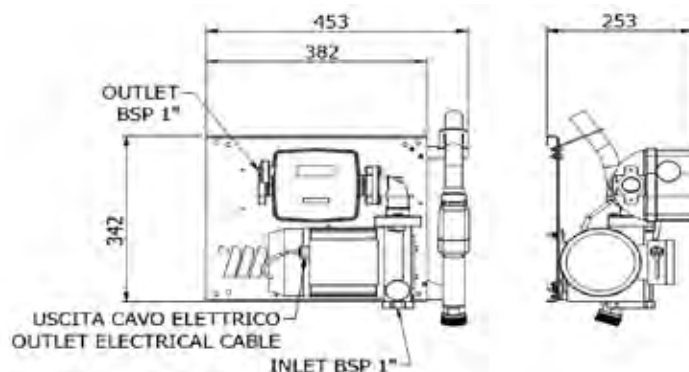

Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V/Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-5045-060	Compact	60	230/50	460	F1" - F1"	20	Aut.PA60	3C	Contin.	16,00	410X400X320
090-5045-070	Compact	70	230/50	552	F1" - F1"	20	Aut.PA60	3C	Contin.	17,00	410X400X320
090-5045-100	Compact	100	230/50	805	F1" - F1"	25	Aut.PA120	4C	Contin.	22,00	410X400X320

090-5046-060	Compact	60	230/50	460	F1" - F1"	20	Man.	3C	Contin.	15,50	410X400X320
090-5046-070	Compact	70	230/50	552	F1" - F1"	20	Man.	3C	Contin.	16,50	410X400X320
090-5046-100	Compact	100	230/50	805	F1" - F1"	25	Man.	4C	Contin.	21,50	410X400X320

090-5045-07X	Compact	70	115/60	575	F1" - F1"	20	Aut.PA60	3C	Contin.	17,00	410X400X320
090-5045-10X	Compact	100	115/60	977	F1" - F1"	25	Aut.PA120	4C	Contin.	22,00	410X400X320

090-5046-07X	Compact	70	115/60	575	F1" - F1"	20	Man.	3C	Contin.	16,50	410X400X320
090-5046-10X	Compact	100	115/60	977	F1" - F1"	25	Man.	4C	Contin.	21,50	410X400X320

090-5045-Y45	Compact	45	12	264	F1" - F1"	20	Aut.PA60	3C	40	13,70	410X400X320
090-5045-Z45	Compact	45	24	312	F1" - F1"	20	Aut.PA60	3C	40	13,70	410X400X320

090-5045-Y60	Compact	60	12	336	F1" - F1"	20	Aut.PA60	3C	40	15,20	410X400X320
090-5045-Z60	Compact	60	24	432	F1" - F1"	20	Aut.PA60	3C	40	15,20	410X400X320

090-5046-Y45	Compact	45	12	264	F1" - F1"	20	Man.	3C	40	13,00	410X400X320
090-5046-Z45	Compact	45	24	312	F1" - F1"	20	Man.	3C	40	13,00	410X400X320

090-5046-Y60	Compact	60	12	336	F1" - F1"	20	Man.	3C	40	14,50	410X400X320
090-5046-Z60	Compact	60	24	432	F1" - F1"	20	Man.	3C	40	14,50	410X400X320